smart platform rental ltd



Rental | Rehire | Sales



OUR VALUES

Smart Platform Rental Ltd has been the pioneering force behind self-drive vehicle-mounted powered access hire in the UK since its inception in 2002. Cost-effectiveness, convenience, transparency, and a high-quality service have been the core values that have led Smart to provide a real alternative to traditional access solutions. We pride ourselves on providing:

- Cost-effectiveness: fair prices so your job stays affordable.
- Convenience: register and hire on the same day; platforms can be driven on a standard driving licence.
- Comprehensive: an extensive fleet ranging in height, performance, and price.
- Transparency: a stable fixed pricing structure that is published and is easily understood.
- Quality: excellent customer experience recognised by our range of certifications.

We have invested in a network of 7 depots across the country, to make your hire experience with us a positive one.

Staff knowledge is a key component to the service we offer. Much of our customer base relies on our sector-specific experience when specifying the best access solution for each work at height application.

We maintain our fleet to a high standard, so you benefit from all the productivity and safety features modern vehicle mounts offer.



FLEXIBLE

- Self-Drive Hire
- Hire By The Day
- AM/PM Options
- Operated Hires
- Deliver To You

RENTAL SOLUTIONS TAILORED TO YOU

Our machines have great mobility. Unlike traditional self-propelled, scissor lifts and scaffolding, you can use our vehicle mounts for multiple site visits on the same hire. This spreads the hire costs over several jobs, making for more effective working solutions.

Self-Drive Access Hire
Self-drive from 11m to 27m; operated hire up to 56m. More and more contractors are seeing a positive impact on their margins by choosing the self-drive option.

Some of the benefits include:

- Clear daily rates, published online.
- No downtime waiting on site for platform delivery
- You control when to collect and return
- A handover familiarisation at the start of every hire
- Competitively priced Collision Damage Waiver

The move to self-drive is the quick, simple, and economic choice for your business.

Weekend and AM/PM Options
Overnight and weekend working is favoured by many of our customers for sector-specific needs and getting the most from their hire. To accommodate this need, we provide weekend packages, plus PM collection and AM return, £40 + VAT.

Delivery
If you prefer, we also offer a delivery service to your office or site. Minimum hire periods apply.

Operated Hire
Smart also provides fully qualified and experienced operators as an alternative to self-drive.











NOT JUST TRUCK MOUNT TRAINING

Safety is paramount to us, and we strongly recommend obtaining full IPAF operator certification. We appreciate that many of our clients use other forms of access as well as truck mounts.

Through Smart Rent-All, our rehire division, we can arrange accredited training including:

- Category 1b: Static Boom: Vehicle & Trailer Mounted Booms
- Category 3b: Mobile Boom: Self Propelled Booms
- Category 3a: Mobile Vertical: Scissor Lifts

Any combination of these categories can be undertaken in a one-day course and provides you with a 5-year internationally recognised accreditation. If you use mobile scaffold towers, PASMA-certified courses can be arranged too. Other courses include:

- Tower Training Course
- Low Level Course (e.g. podiums)
- Combined Course (Low Level & Tower)
- Harness Usage Course
- Ladder Training Course
- Work at Height Essentials Course
- MEWPs For Managers Course
- PAL+ Advanced Operator Course

Highly trained staff using our well-maintained and robust platforms are key elements for safe and efficient work at height. Another vital element are the accessories that you use.

We offer and recommend fall restraint harnesses and lanyards custom made for specific truck mount usage. In addition, we also offer wind meters.

To arrange training, call our rehire team on 0333 700 7100.



LONG-TERM HIRE

If you find yourself more regularly using platforms you may wish to consider committing to longer hires (over 3 months) and reviewing the extended term schemes we offer.

A number of customers have chosen this option which can include:

- Discounted Rates
- Predictable in-Life Costs
- Replacement Machines During Routine Maintenance
- De-branded machines available; personalised livery on longer contracts, subject to agreement



EX-FLEET TRUCK SALES

If you feel that you're committed to using truck mounts to the extent where you're interested in outright purchase then we can offer a large range of ex-fleet machines ranging in platform height, age and price.

Our ex-fleet trucks start from £11,000 + VAT and come with:

- One owner from new
- Fresh LOLER, MOT and service
- Warranty of 1 month or 1,000 miles
- Delivery can be arranged
- Finance available through a broker

We regularly invest in our fleet of vehicle-mounted cherry pickers. This means that we frequently have a wide range of ex-fleet truck and van mounted access for sale.

For more information and a fully up to date stock list please visit our website.



Operated Rental

WHY CHOOSE OPERATED?

Our operated cherry picker fleet offers a range of heights from 20m to 56m, each operated by a qualified professional who will meet you on-site and be ready to assist. This allows you and your team to concentrate on your tasks while we handle the safe operation of the MEWP.

We provide operated hires across a wide range of sectors, including TV, film, construction, infrastructure, aviation, wind energy, and many others. When it comes to expert work at height, we're well equipped for the job.

Our operators hold qualifications including:

- CSCS (Construction Skills Certification Scheme)
- Highways Passport
- Safety Critical
- First Aid
- IPAF
- MBNL (Approved for telecoms work)

Not every operator holds every card, so tell us your site's requirements when you order.

Half day 4 hours; full day 8 hours including travel; extended 10-hour day. Nights and weekends available.



Locations

7 Depots Strategically Located Around the National Motorways









MANCHESTER J9 M60 | J21a M6

3 Queensmead Place, Textilose Road, off Westinghouse Road,
Trafford Park, Manchester, M17 1PH

SHEFFIELD J34 M1

Unit 6 Surbiton Street, off Broughton Lane, Sheffield Industrial Estate,
Sheffield, South Yorkshire S9 2DN

BIRMINGHAM J9 M42 & M6 Toll | J6 M6

G5-G6 Minworth Trade Park, Stockton Close, off Forge Lane,
Sutton Coldfield, West Midlands, B76 1DH

HEMEL HEMPSTEAD J7 & J8 M1 | J21a M25

14 McDonald Business Park, McDonald Way, off Maylands Avenue,
Hemel Hempstead, Hertfordshire, HP2 7EB

DARTFORD J1a M25 | J1 M20

8 Newton's Court, off Galleon Boulevard, Crossways Business Park,
Dartford, Kent, DA2 6QL

BRISTOL J18 M5 | J22 M4

111a Burcott Road, Avonmouth,
Bristol, BS11 8AF

SOUTHAMPTON J13 M3 | J4/5 M27

Unit 1, Parham Drive, Eastleigh,
Southampton, Hampshire, SO50 4NU

V11T | CPL KL21B


11.4m

6.8m

Working height	11.4m	Basket size	.72 X .86m
Outreach	6.8m	Safe working load	120KG
Overall travel length	6.2m	Vehicle Weight	3500KG
Overall travel height	2.8m	No outriggers	
Overall travel width	2.2m	Internal storage	



SCAN ME

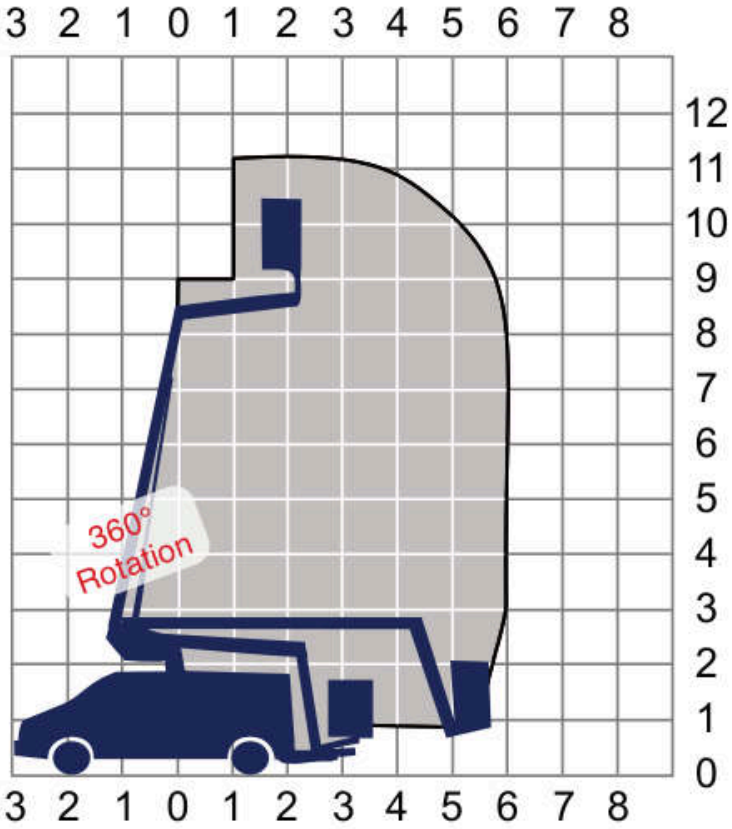

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

V12 | Ascendant A12.5VM


12.5m

7.7m

Working height	12.5m	Basket size	.80 x 1.3m
Outreach	7.7m	Safe working load	230KG
Overall travel length	7.26m	Full operational width	2.6m
Overall travel height	3.48m	Vehicle Weight	3500KG
Overall travel width	2.2m	Internal storage	



SCAN ME

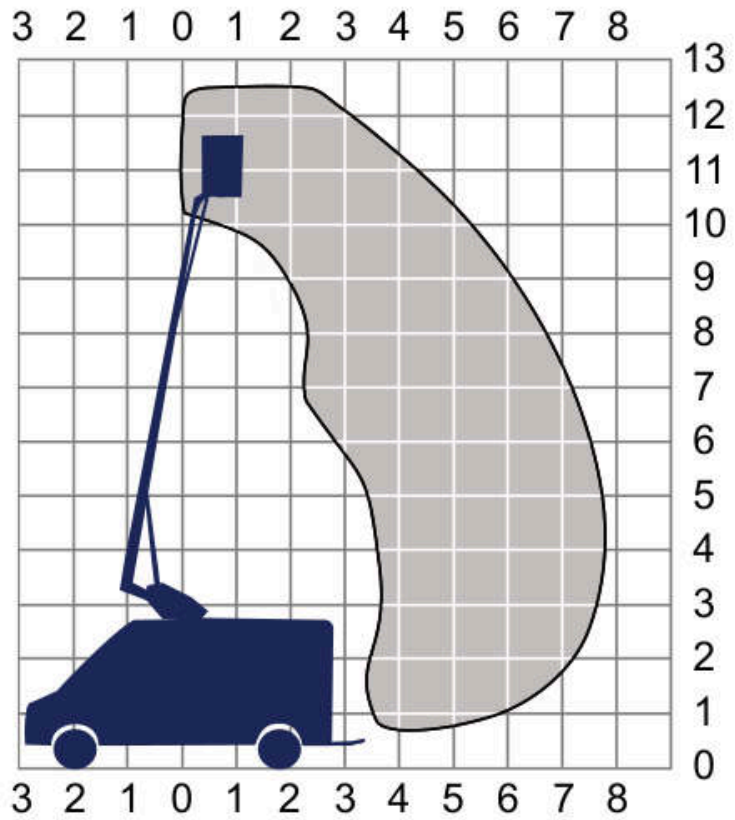

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

V12T | Versalift ETL-36-130-F


13m

7.3m

Working height	13m	Basket size	.55 x .95m
Outreach	7.3m	Safe working load	200KG
Overall travel length	6.7m	Full operational width	2.6m
Overall travel height	3.4m	Vehicle Weight	3500KG
Overall travel width	2.2m	Internal storage	



SCAN ME

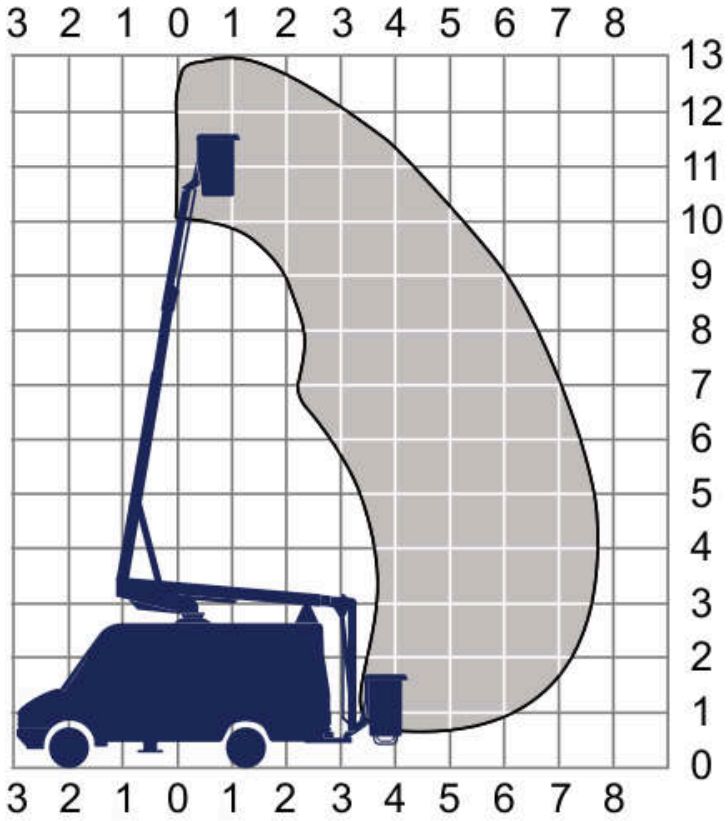

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

V12T | CPL K38P


13.8m

6.5m

Working height	13.8m	Basket size	.75 x 1.25m
Outreach	6.5m	Safe working load	200KG
Overall travel length	6.6m	Full operational width	2.6m
Overall travel height	3.3m	Vehicle Weight	3500KG
Overall travel width	2.6m	Internal storage	



SCAN ME

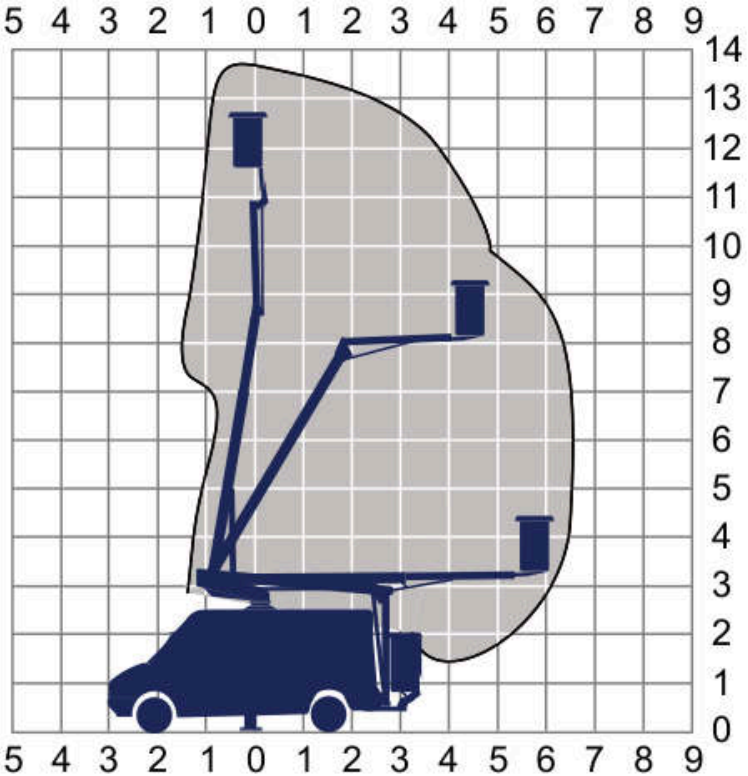

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

RT13 | CPL DMAX


13.2m

6.5m

Working height	13.2m	Basket size	.72 x 1.14m
Outreach	6.5m	Safe working load	240KG
Overall travel length	5.9m	Full operational width	2.8m
Overall travel height	2.6m	Vehicle Weight	3500KG
Overall travel width	2.1m	Point load	30kN



SCAN ME

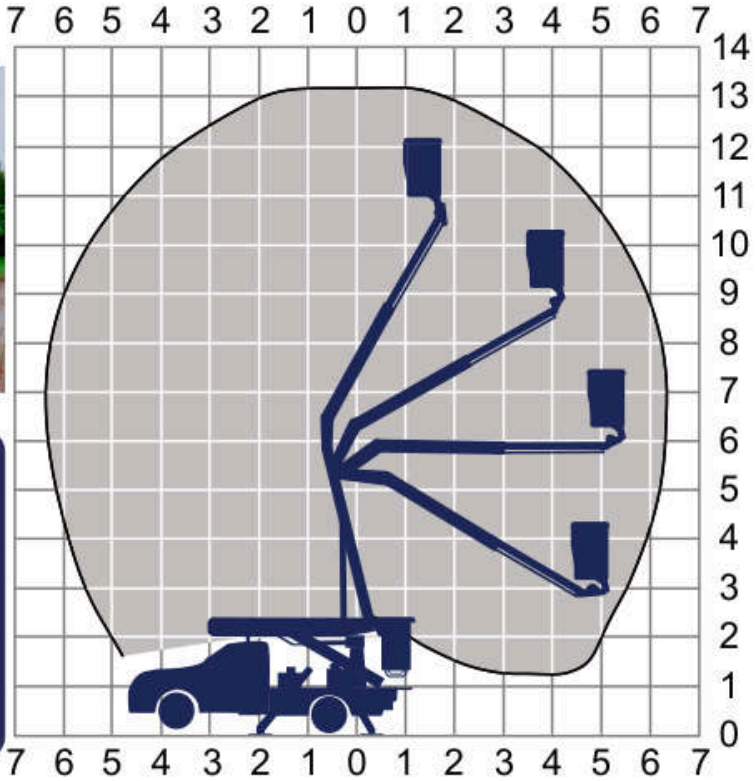

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S18 | GSR B180T

17.9m


11m

Working height	17.9m	Basket size	.7 x 1.4m
Outreach	11m	Safe working load	300KG
Overall travel length	6.23m	Full operational width	2.3m
Overall travel height	3.05m	Vehicle Weight	3500KG
Overall travel width	2.2m	Point load front/rear	20/25kN



300KG 80KG

SCAN ME

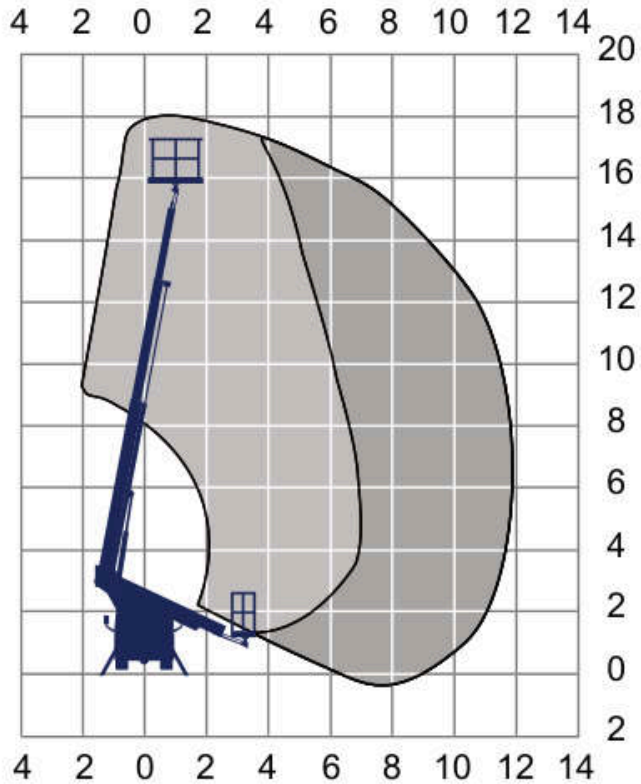

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z20 | CTE ZED 20.3HB


20m

8.8m

Working height	20m	Basket size	.7 x 1.1m
Outreach	8.8m	Safe working load	230KG
Overall travel length	7.7m	Full operational width	2.8m
Overall travel height	3.05m	Vehicle Weight	3500KG
Overall travel width	2.3m	Point load front/rear	28/28kN



SCAN ME

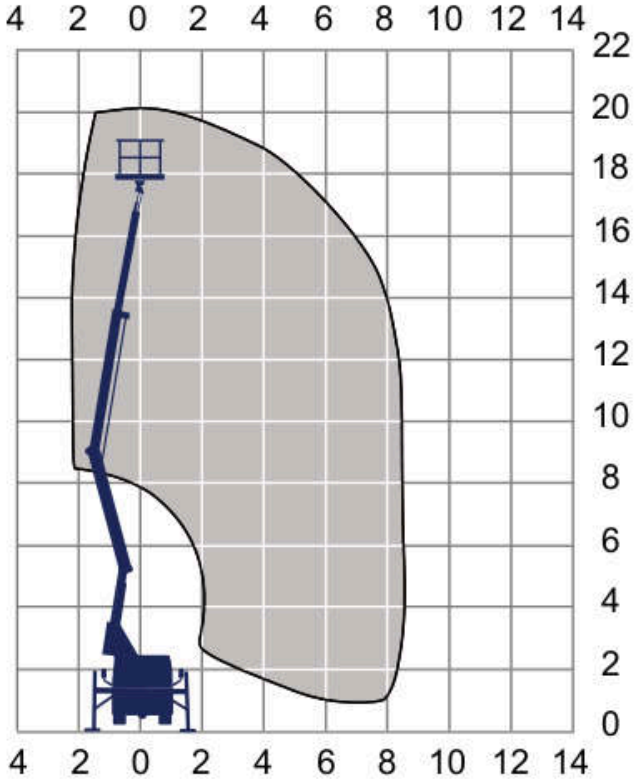

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z20i | CTE ZED 20.4HN


20m

8.2m

Working height	20m	Basket size	.7 x 1.1m
Outreach	8.2m	Safe working load	250KG
Overall travel length	7.7m	Full operational width	2.5m
Overall travel height	2.8m	Vehicle Weight	3500KG
Overall travel width	2.3m	Point load front/rear	28/28kN



SCAN ME

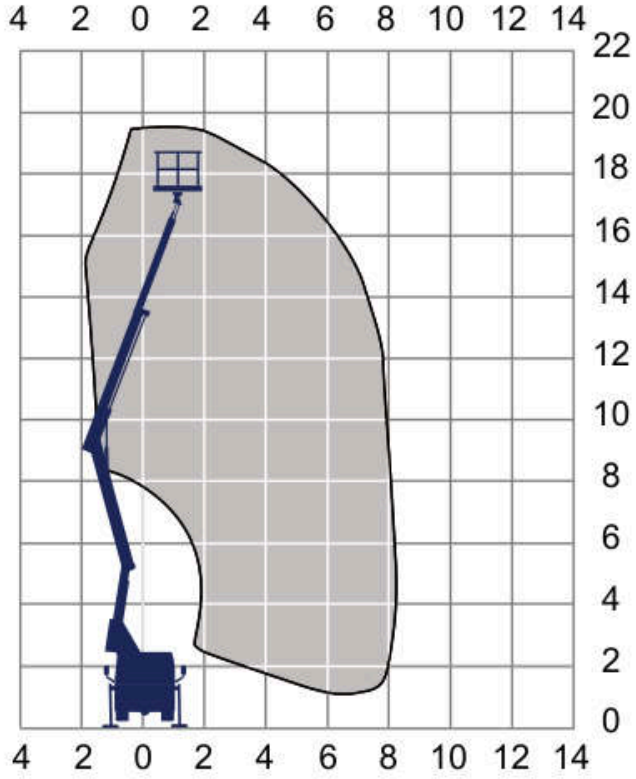

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z20M | GSR B200PX


20.6m

9m

Working height	20.6m	Basket size	.7 x 1.4m
Outreach	9m	Safe working load	250KG
Overall travel length	7.7m	Full operational width	3.05m
Overall travel height	2.85m	Vehicle Weight	3500KG
Overall travel width	2.4m		



SCAN ME

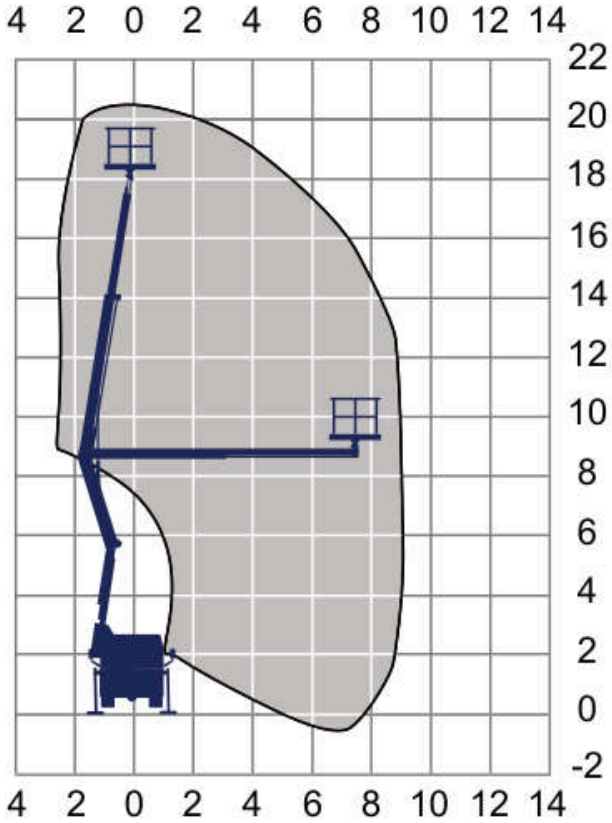

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S20J | Multitel MJ201

20.1m


12.6m

Working height	20.1m	Basket size	.7 x 1.1m
Outreach	12.6m	Safe working load	250KG
Overall travel length	7.7m	Full operational width	3.3m
Overall travel height	3m	Vehicle Weight	3500KG
Overall travel width	2.2m		



250KG 80KG

SCAN ME

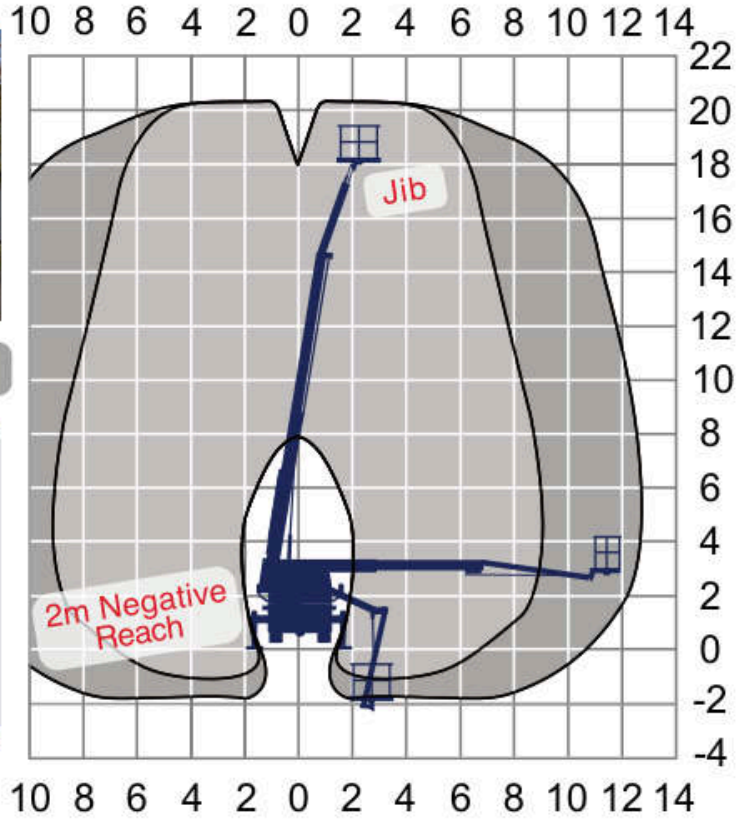


Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z21 | CTE ZED 21.3 JHL


21m

10m

Working height	21m	Basket size	.7 x 1.4m
Outreach	10m	Safe working load	300KG
Overall travel length	7.5m	Full operational width	4m
Overall travel height	2.8m	Vehicle Weight	3500KG
Overall travel width	2.3m	Point load front/rear	25/30kN

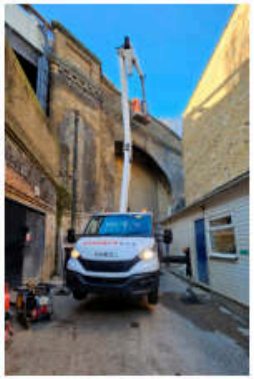

SCAN ME

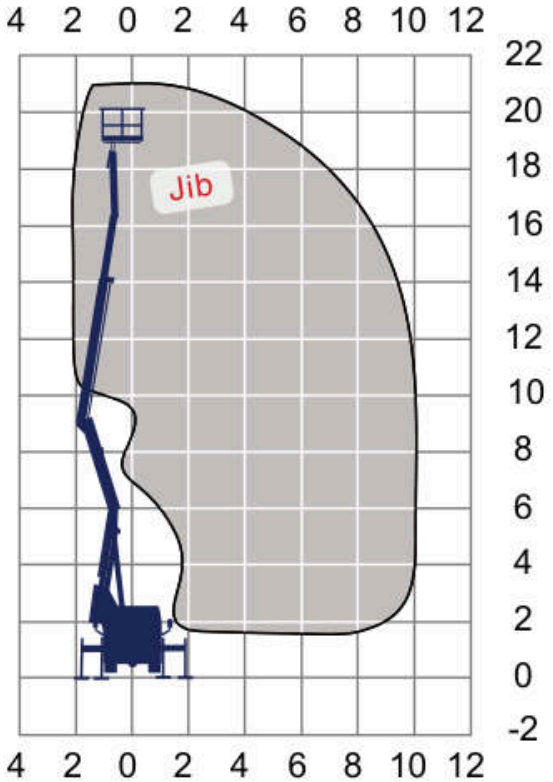

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z21MS | GSR B210PXJ


20.2m

10m

Working height	20.2m	Basket size	.7 x 1.4m
Outreach	10m	Safe working load	250KG
Overall travel length	7.55m	Full operational width	3.4m
Overall travel height	2.8m	Vehicle Weight	3500KG
Overall travel width	2.4m	Point load front/rear	22.5/32.5kN



SCAN ME

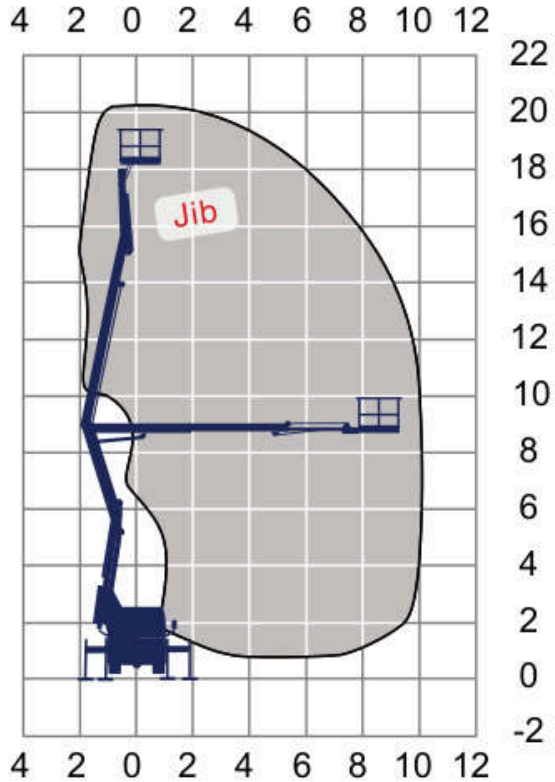

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z21SG | CTE ZED 21.2 JH


20.7m

9.9m

Working height	20.7m	Basket size	.7 x 1.4m
Outreach	9.9m	Safe working load	280KG
Overall travel length	6.8m	Full operational width	3m
Overall travel height	2.6m	Vehicle Weight	3500KG
Overall travel width	2.2m		



SCAN ME

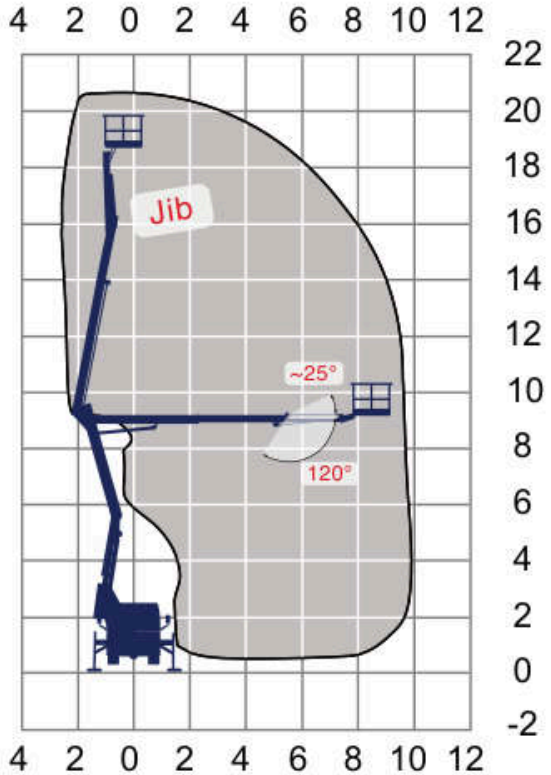


Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

Z23JH | ZED 23.3 JHL


22.6m

10m

Working height	22.6m	Basket size	.7 x 1.4m
Outreach	10m	Safe working load	250KG
Overall travel length	7.5m	Full operational width	4m
Overall travel height	2.8m	Vehicle Weight	3500KG
Overall travel width	2.3m	Point load front/rear	28/28kN

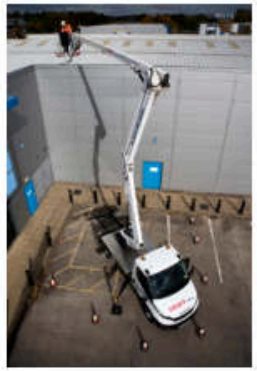

SCAN ME

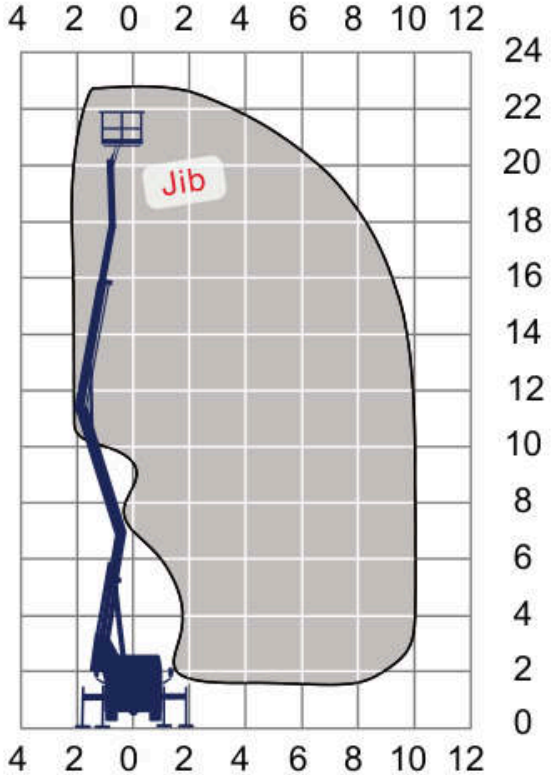


Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

VEHICLE SPECIFICATIONS

Working height	27m	Basket size	.7 x 1.4m
Outreach	17m	Safe working load	250KG
Overall travel length	7.7m	Vehicle Weight	3500KG
Overall travel height	3m	Cage Rotation	x2 90°
Overall travel width	2.5m	Point load front/rear	17kN/17kN




SCAN ME

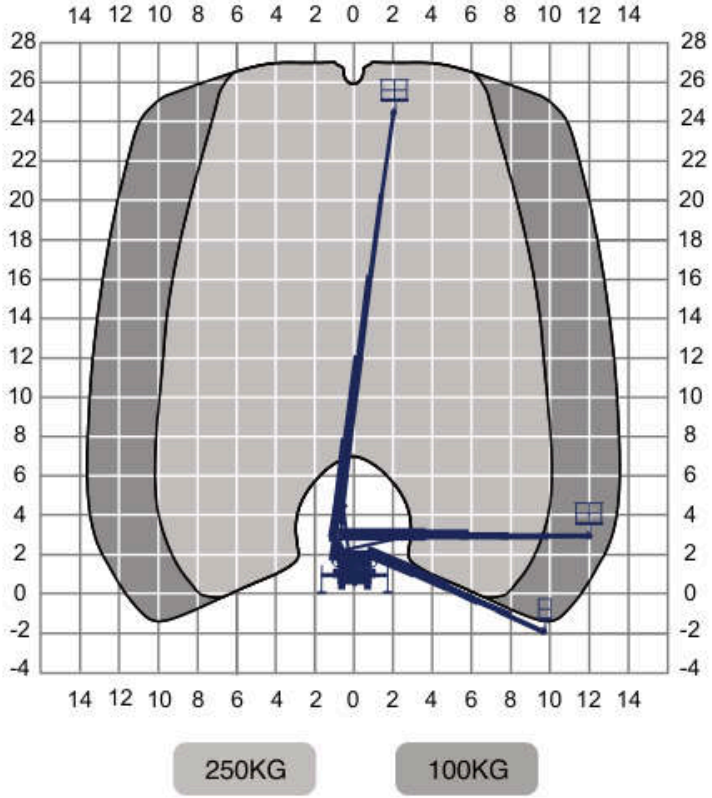


JACKING


Full jacking	
Width	2.93m
Outreach at 250KG	12m
Outreach at 100KG	17m

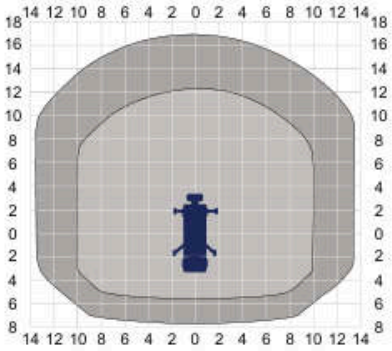

One side jacking	
Width	2.72m
Outreach at 250KG	12m
Outreach at 100KG	17m

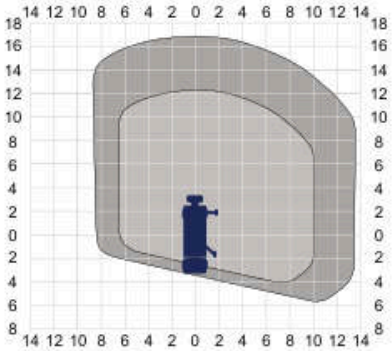

Straight down jacking	
Width	2.5m
Outreach at 250KG	12m
Outreach at 100KG	17m

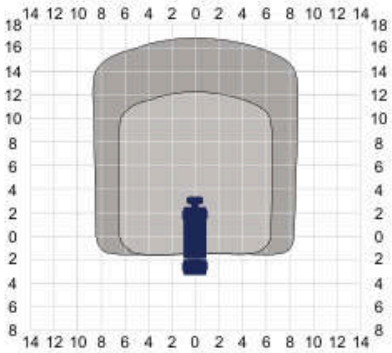

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.



WHY CHOOSE HYBRID?

A hybrid engine reduces fuel consumption and emissions, meeting environmental regulations while cutting long-term fuel and maintenance costs. Its quieter operation suits noise-sensitive urban areas, and emission-free indoor use adds versatility.

A hybrid truck-mounted cherry picker supports sustainability, enhances flexibility, and offers cost-effective performance, making it a smart investment.

- Better Fuel Consumption
- Electric Indoor Use
- Quiet Operation
- Environmentally Friendly

V12HY | CPL K38P Hybrid


13.8m

6.5m


Working height	13.8m	Basket size	.75 x 1.25m
Outreach	6.5m	Safe working load	200KG
Overall travel length	6.6m	Full operational width	2.6m
Overall travel height	3.3m	Vehicle Weight	3500KG
Overall travel width	2.6m		



SCAN ME

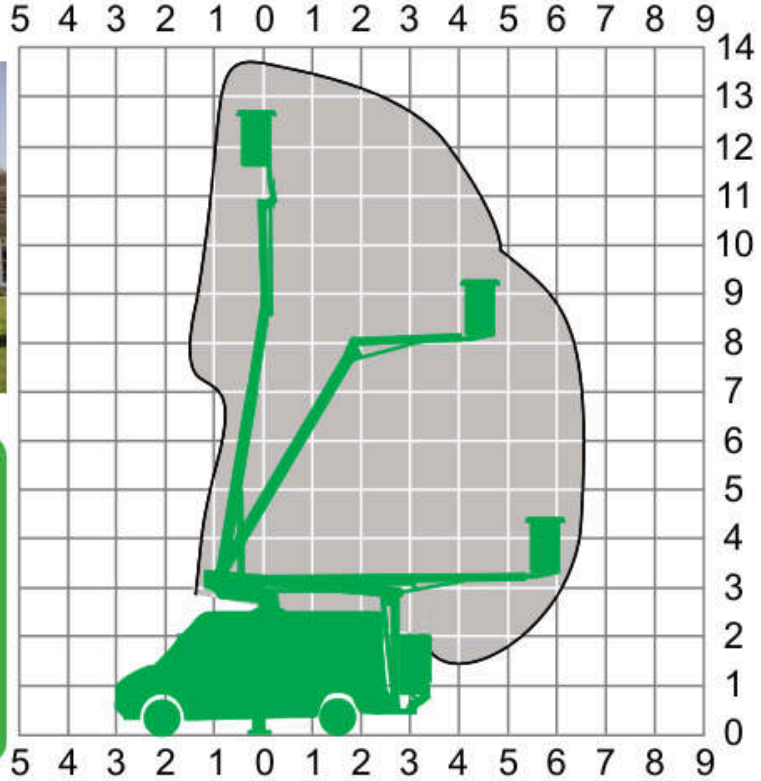

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

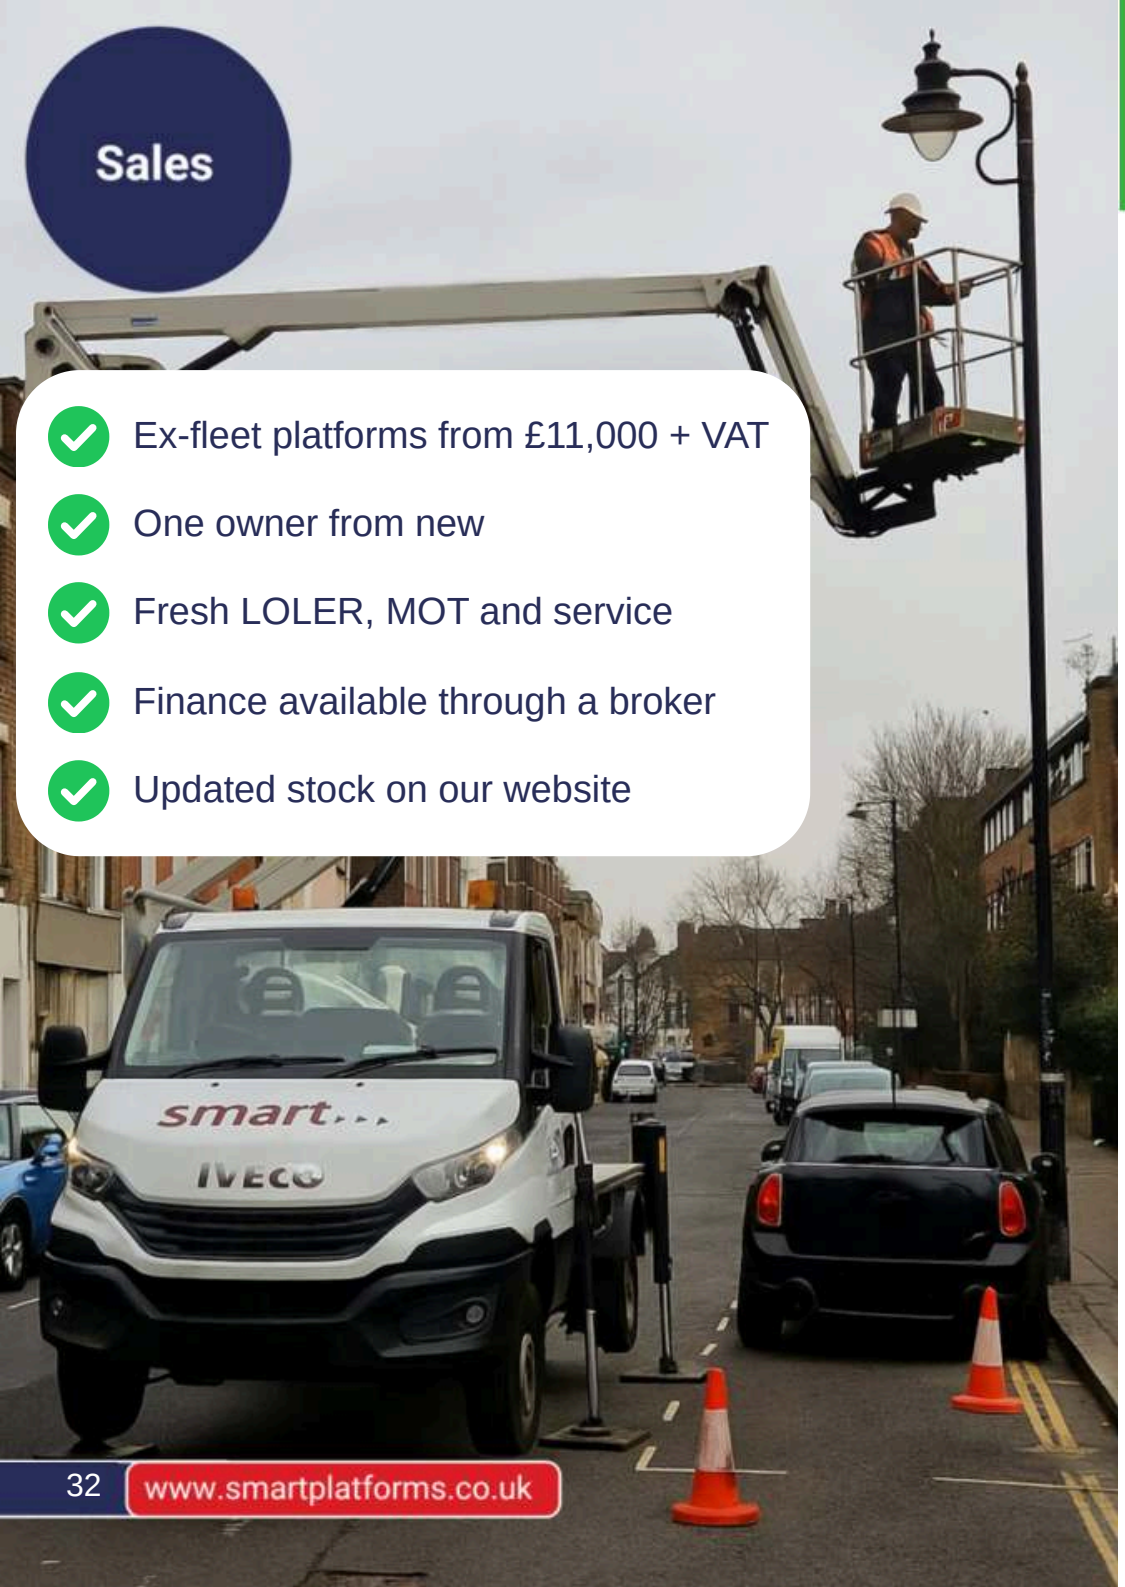

- Ex-fleet platforms from £11,000 + VAT
- One owner from new
- Fresh LOLER, MOT and service
- Finance available through a broker
- Updated stock on our website

S18HY | Multitel MT182 Hybrid

18.2m

13.2m


Working height	18.2m	Basket size	.7 x 1.4m
Outreach	13.2m	Safe working load	250KG
Overall travel length	7.62m	Full operational width	3.3m
Overall travel height	2.8m	Vehicle Weight	3500KG
Overall travel width	2.2m	Point load front/rear	15kN/30kN



250KG 200KG

80KG

SCAN ME

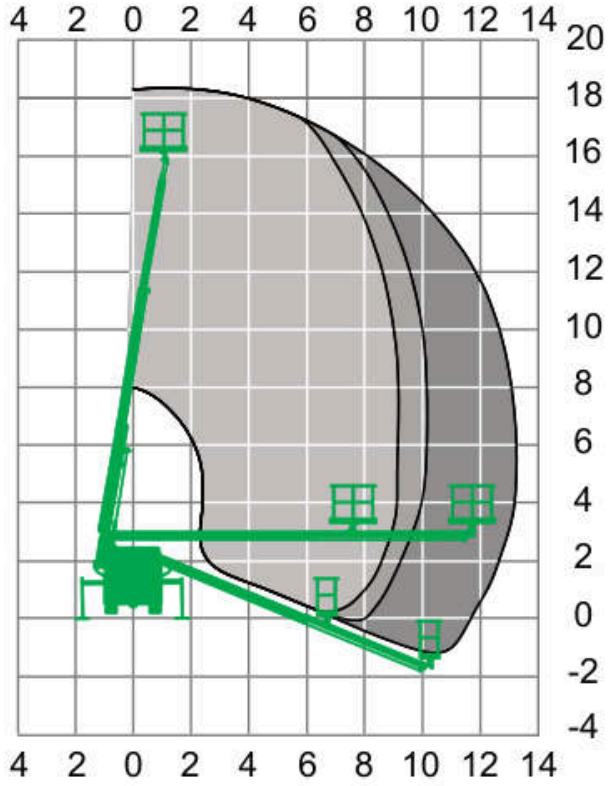

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

VEHICLE SPECIFICATIONS

Working height	35.5m	Basket size	0.9 x 2m
Outreach	20m	Safe working load	360KG
Overall travel length	7.5m	Vehicle Weight	12 tonne
Overall travel height	3.7m	Cage Rotation	90° + 90°
Overall travel width	2.4m	Point load front/rear	45kN/84kN

JACKING


	Full	One Side	Straight Down
Width	3.5m	2.8m	2.4m

AVAILABLE EXTRAS

Lights


SCAN ME FOR BOOKING & INFORMATION



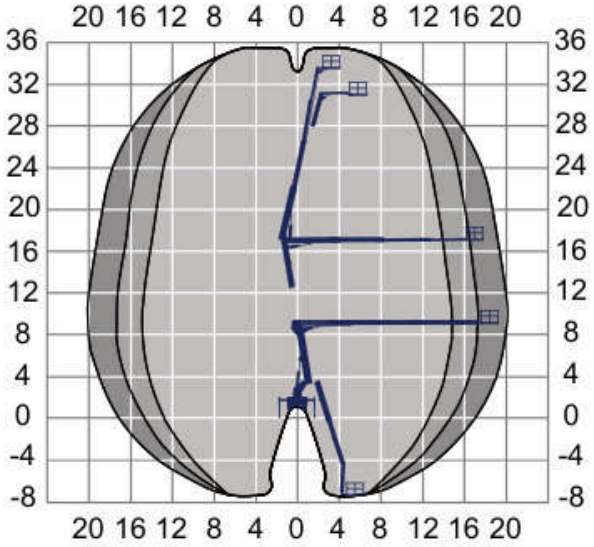



360KG 200KG 80KG

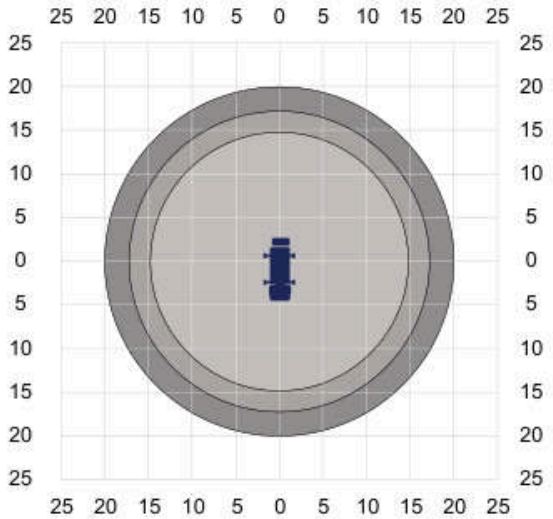

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S33J | Ruthmann T330

33m

21m

VEHICLE SPECIFICATIONS

Working height	33m	Basket size	0.9 x 1.7m
Outreach	21m	Safe working load	320KG
Overall travel length	8.8m	Vehicle Weight	7.5 tonne
Overall travel height	3.6m	Cage Rotation	90° + 90°
Overall travel width	2.5m	Point load front/rear	56kN/42kN

JACKING


	Full	One Side	Straight Down
Width	5.8m	3.92m	2.53m

AVAILABLE EXTRAS

Lights

SCAN ME FOR BOOKING & INFORMATION




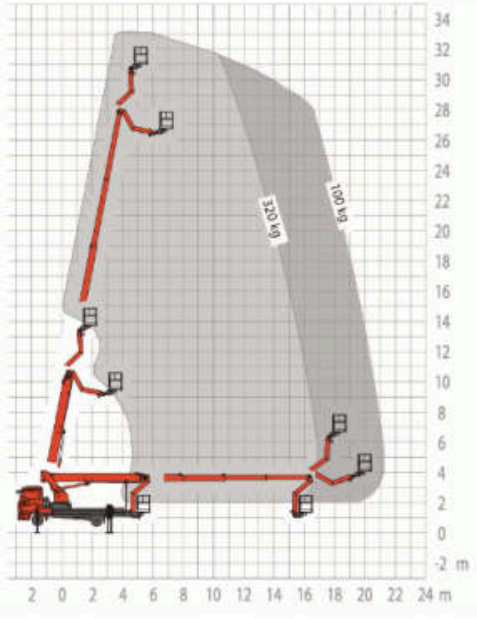

320KG

100KG



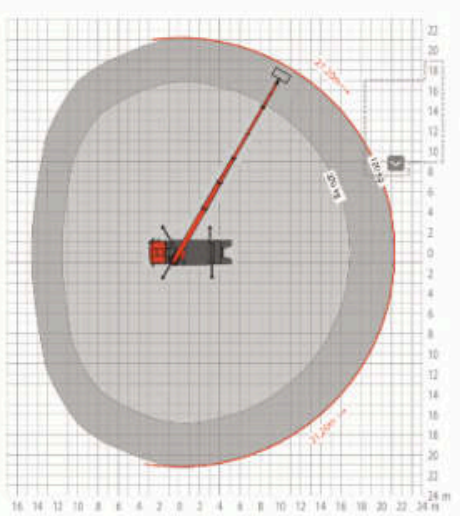

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S35J | Bronto S35EM

35m

29m

VEHICLE SPECIFICATIONS

Working height	35m	Basket size	0.9 x 2.4m
Outreach	29m	Safe working load	450KG
Overall travel length	10.4m	Vehicle Weight	18 tonne
Overall travel height	3.75m	Cage Rotation	90° + 90°
Overall travel width	2.5m	Point load front/rear	120kN/120kN

JACKING

	Full	One Side	Straight Down
Width	5.9m	4.5m	2.5m

AVAILABLE EXTRAS

Winch

Generator


Lifting Frame

Secondary Guarding


Lights

SCAN ME FOR BOOKING & INFORMATION



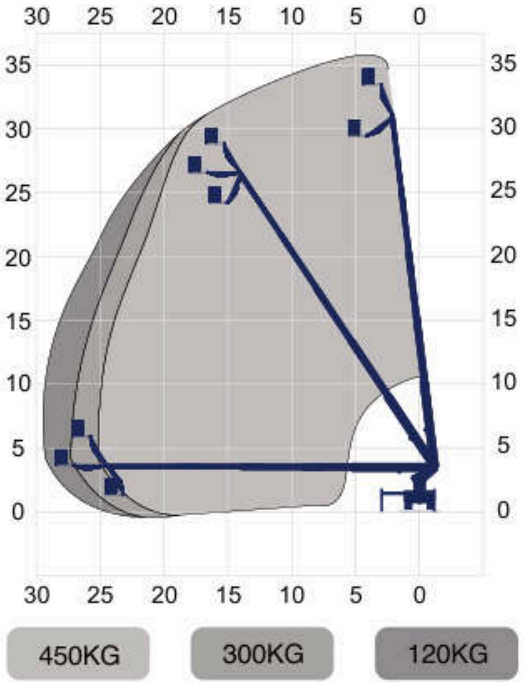



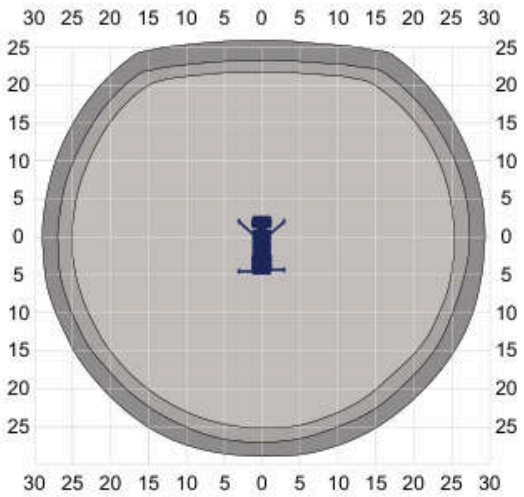

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S51J | Ruthmann T510 FLEX

51m

33m

VEHICLE SPECIFICATIONS

Working height	51m	Basket size	1 x 3.7m*
Outreach	33m	Safe working load	600KG
Overall travel length	10.4m	Vehicle Weight	18 tonne
Overall travel height	3.8m	Cage Rotation	220° + 220°
Overall travel width	2.6m	Point load front/rear	160kN/160kN

*With cage extended

JACKING

	Full	One Side	Straight Down
Width	6.6m	4.6m	2.6m

AVAILABLE EXTRAS

Winch

Generator


Lifting Frame


Secondary Guarding

Lights


SCAN ME FOR BOOKING & INFORMATION



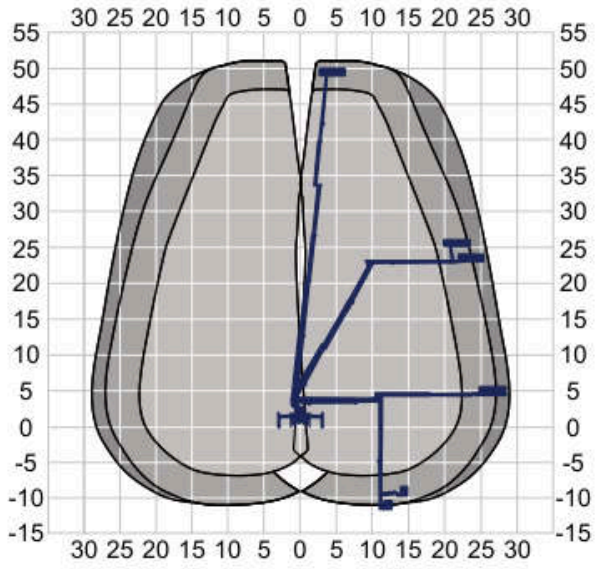

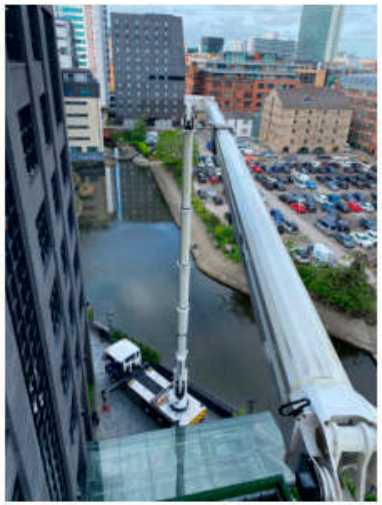

600KG 320KG 100KG

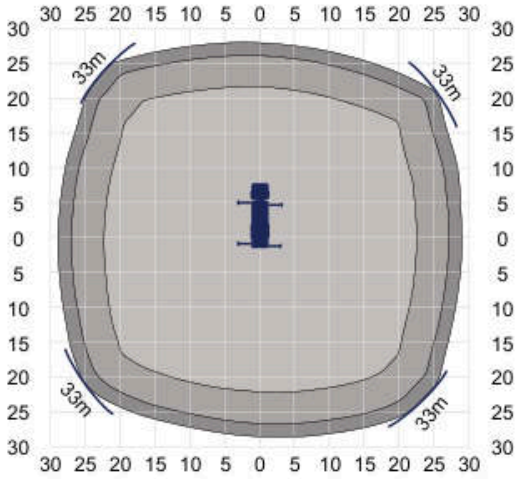

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S51J | Ruthmann T510 FLEX 3a

51m

33m

VEHICLE SPECIFICATIONS

Working height	51m	Basket size	1 x 3.7m*
Outreach	33m	Safe working load	600KG
Overall travel length	10.4m	Vehicle Weight	26 tonne
Overall travel height	3.8m	Cage Rotation	220° + 220°
Overall travel width	2.6m	Point load front/rear	160kN/160kN

*With cage extended

JACKING

	Full	One Side	Straight Down
Width	6.6m	4.6m	2.6m

AVAILABLE EXTRAS

Winch

Generator


Lifting Frame


Secondary Guarding


Lights

SCAN ME FOR BOOKING & INFORMATION



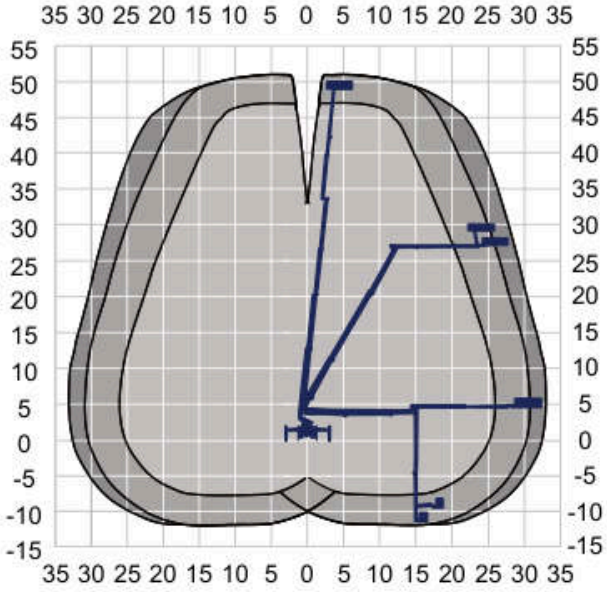

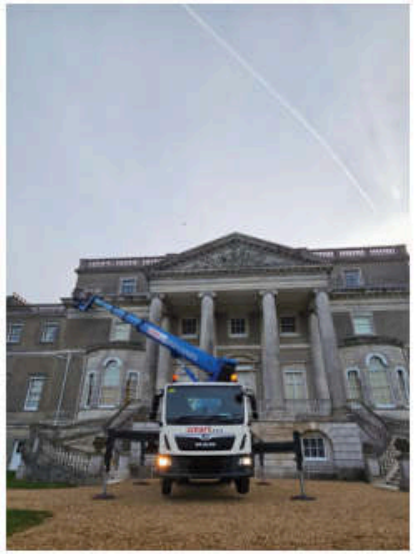

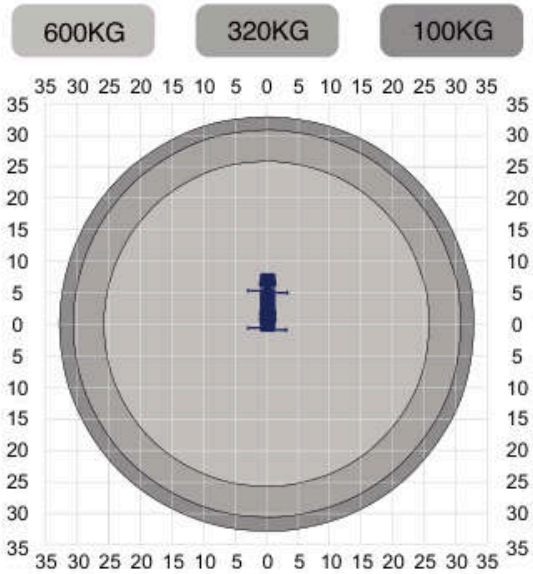

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

S56 | Bronto S56XR XJIB

56m

36m

VEHICLE SPECIFICATIONS

Working height	56m	Basket size	1 x 3.7m*
Outreach	36m	Safe working load	600KG
Overall travel length	12m	Vehicle Weight	26 tonne
Overall travel height	4m	Cage Rotation	280° + 280°
Overall travel width	2.5m	Point load front/rear	190kN/190kN

*With cage extended

JACKING

	Full	One Side	Straight Down
Width	9m	6m	3m

AVAILABLE EXTRAS

Winch

Generator


Lifting Frame


Secondary Guarding

Lights


SCAN ME FOR BOOKING & INFORMATION



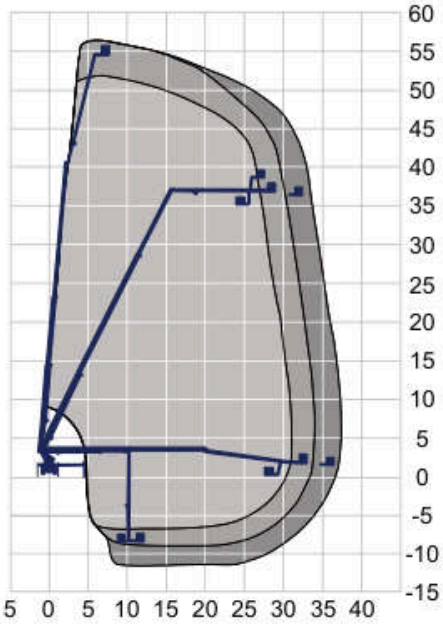

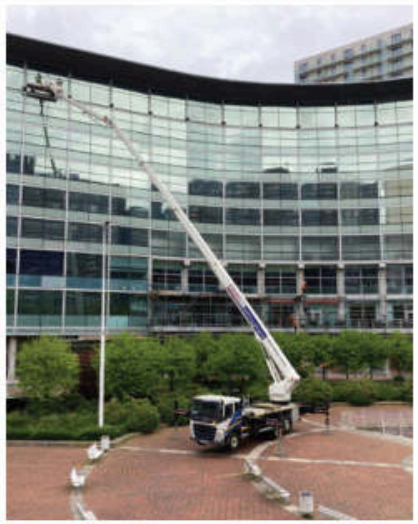

600KG 360KG 120KG

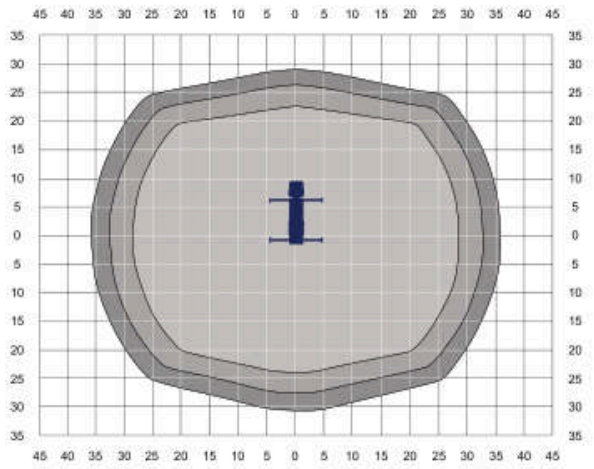

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

VEHICLE SPECIFICATIONS

Working height	56m	Basket size	1 x 3.7m*
Outreach	39m	Safe working load	600KG
Overall travel length	12m	Vehicle Weight	26 tonne
Overall travel height	3.8m	Cage Rotation	90° + 90°
Overall travel width	2.5m	Point load front/rear	190kN/190kN

*With cage extended

JACKING

	Full	One Side	Straight Down
Width	9m	6m	3m

AVAILABLE EXTRAS

Winch


Generator


Lifting Frame

Secondary Guarding


Lights

SCAN ME FOR BOOKING & INFORMATION

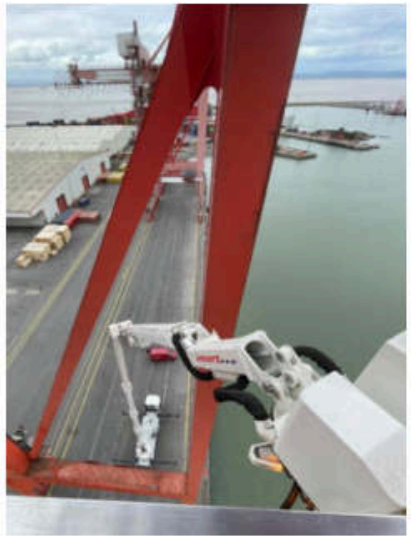

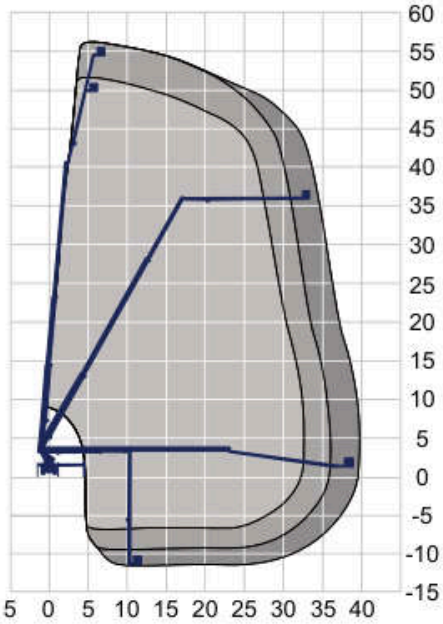



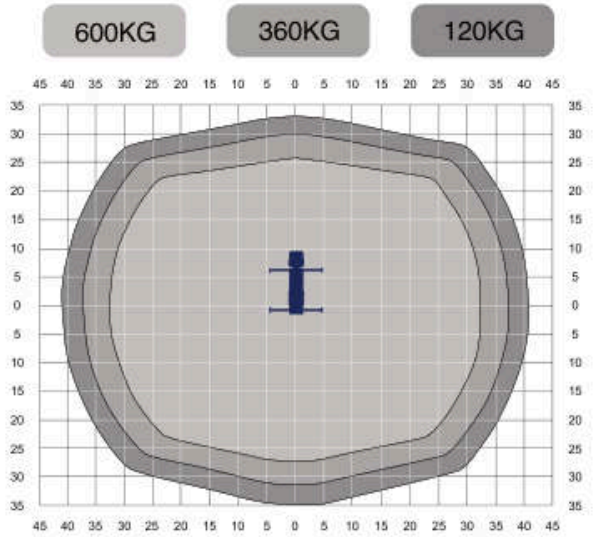

Jacking width is measured to the leg centre, excluding jack pads. Specifications are guidelines, accurate at printing, and subject to change without notice by Smart. Working heights and outreach are “up to” figures.

SCAN FOR PRICES

Our self-drive prices are published, so you know the cost before you hire. Scan the QR code to see them.



Call: 0333 800 6000

Email: hiredesk@smartplatforms.co.uk